

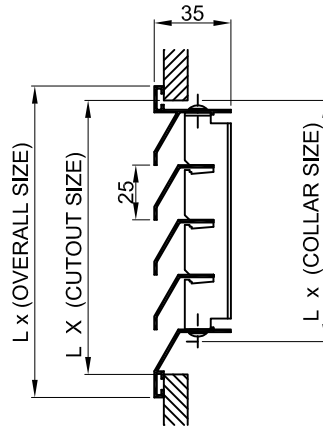
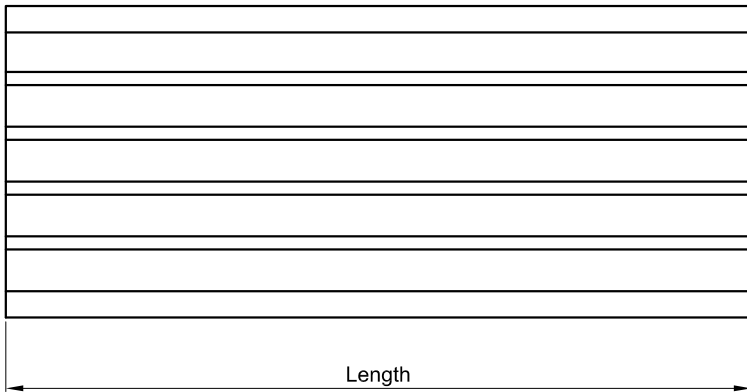


**1. Frame option**

**C** Without end flanges (Continuous type)

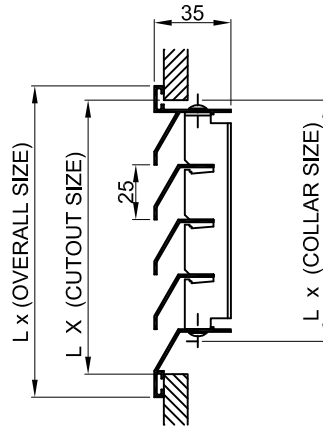

**F** With end flanges (Frame type)

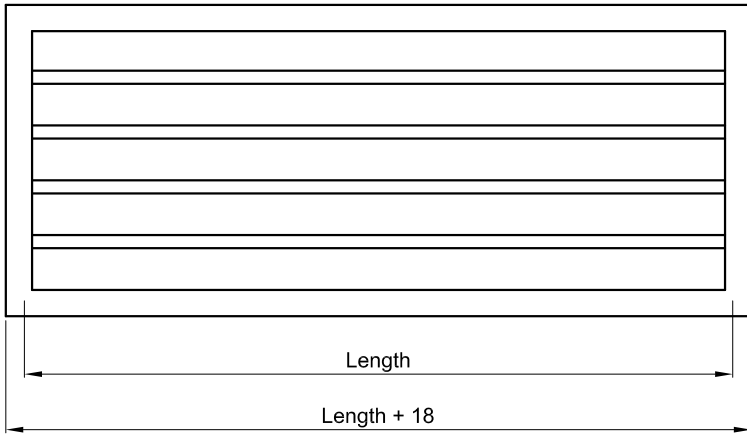

All dimensions are in mm


Sr.no.	Cutout size	Collar size	Overall size
1	100	85	117
2	125	110	142
3	150	135	167
4	175	160	192
5	200	185	217

**DESCRIPTION**

- Extruded aluminum construction.
- Powder coated finish RAL - 9016.
- Standard coating thickness - 55 microns.
- Deflector flow one way.
- Removable inner sections.

**2. Accessory**

**D** Opposed blade damper.

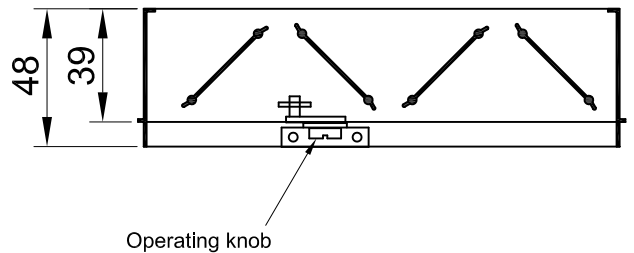



**Model : LDOW-**  **-**

**Note:**



- This submittal is mean to demonstrate general dimension of the product. The drawing on submittal are not mean to detail every aspect of product with exactness. Drawing are not to scale. COSMOS reserve to the right to make changes without written notice.
- All Dimensions are in mm.
- Dimensions are  $\pm 1.5\text{mm}$

**1. Frame option**

**C** Without end flanges (Continuous type)

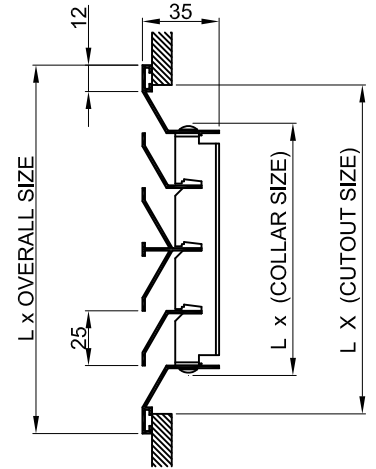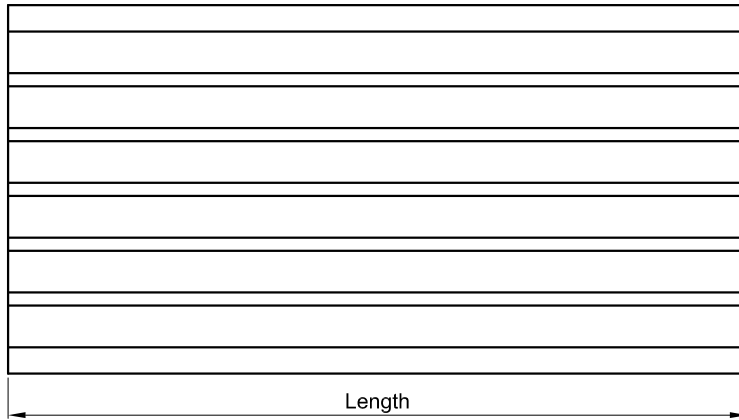

**F** With end flanges (Frame type)

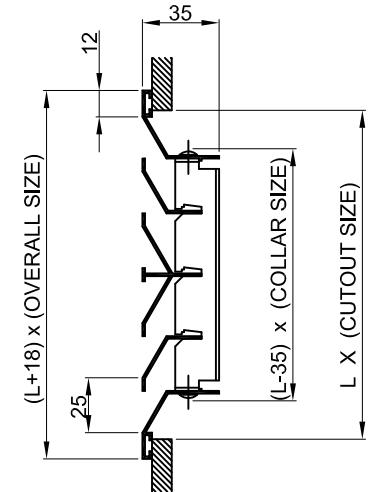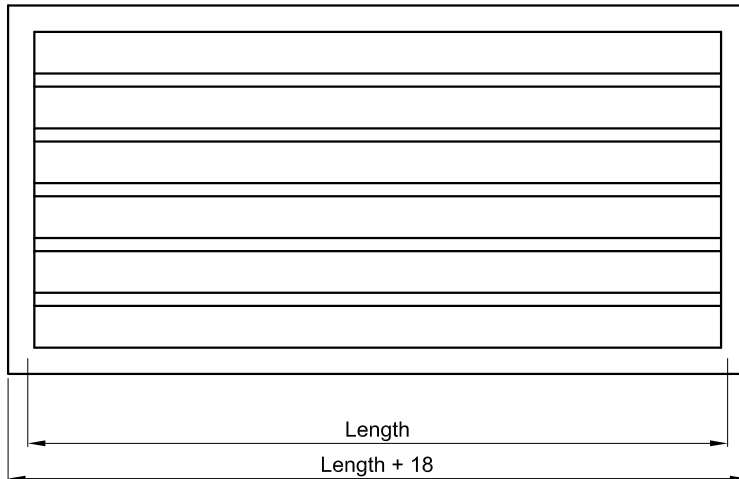

All dimensions are in mm


Sr.no.	Cutout size	Collar size	Overall size
1	100	65	118
2	150	115	168
3	200	165	218
4	250	215	268
5	300	265	318
6	325	290	348

**DESCRIPTION**

- Extruded aluminum construction.
- Powder coated finish RAL - 9016.
- Standard coating thickness - 55 microns.
- Deflector flow two way.
- Removable inner sections.

**2. Accessory**

**D** Opposed blade damper.

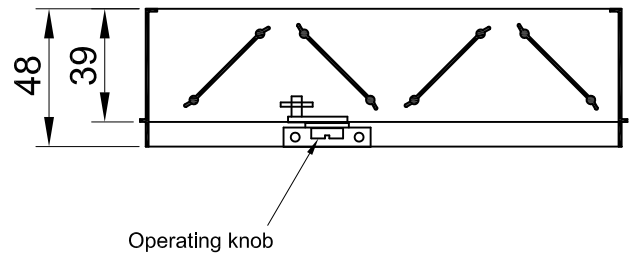

**Model : LDTW-**  -

1                      2

**Note:**

- This submittal is mean to demonstrate general dimension of the product. The drawing on submittal are not mean to detail every aspect of product with exactness. Drawing are not to scale. COSMOS reserve to the right to make changes without written notice.
- All Dimensions are in mm.
- Dimensions are  $\pm 1.5$ mm