


Dimension details

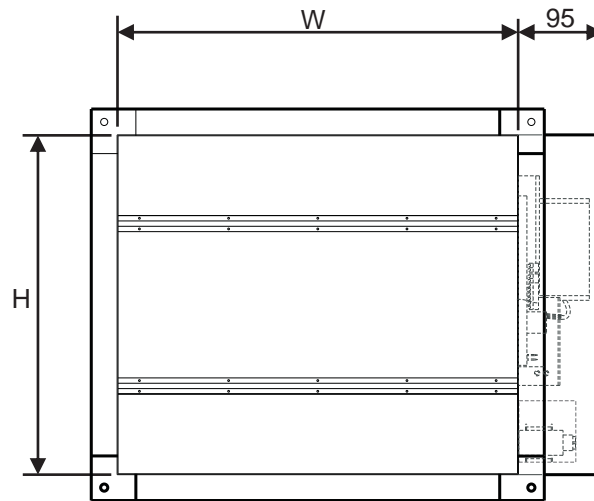

Standard Sizes and Operating CFM range

Height (H) mm	Width (W) mm	200	250	300	400	500	600	700	800	1000
100		40 - 330	50 - 420	60 - 500	80 - 670	100 - 845	120 - 1728	-	-	-
200		80 - 670	100 - 845	120 - 1010	170 - 1350	210 - 1690	250 - 2030	290 - 2370	340 - 2710	-
250		100 - 840	130 - 1050	150 - 1270	210 - 1690	260 - 2110	320 - 2540	370 - 2960	420 - 3380	530 - 4230
300		125 - 1010	150 - 1270	190 - 1520	250 - 2030	320 - 2540	380 - 3040	450 - 3550	510 - 4060	635 - 5080
400		165 - 1350	210 - 1690	250 - 2030	340 - 2710	420 - 3380	510 - 4060	590 - 4740	680 - 5420	850 - 6770
500		210 - 1690	260 - 2110	320 - 2540	420 - 3380	530 - 4230	630 - 5080	740 - 5920	850 - 6770	1060 - 8470
600		-	-	380 - 3040	510 - 4060	630 - 5080	760 - 6090	890 - 7110	1020 - 8130	1270 - 10160
800		-	-	-	680 - 5420	850 - 6770	1020 - 8130	1190 - 9480	1360 - 10840	1700 - 13550
1000		-	-	-	-	-	1270 - 10160	1480 - 11850	1700 - 13530	2120 - 16940