




1. Bar Type

HF Horizontal fixed bar

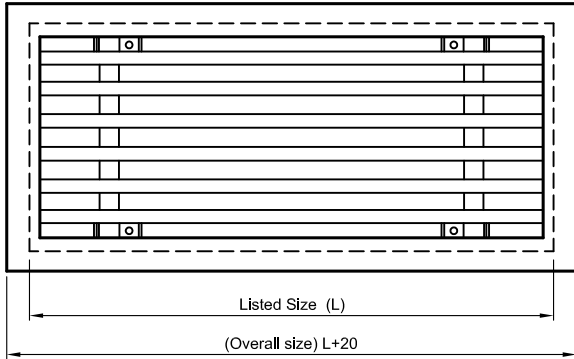


2. Bar Deflection



00 0° Deflection




15 15° Deflection

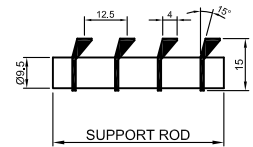


HA Horizontal adjustable bar

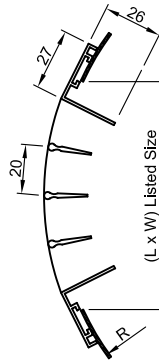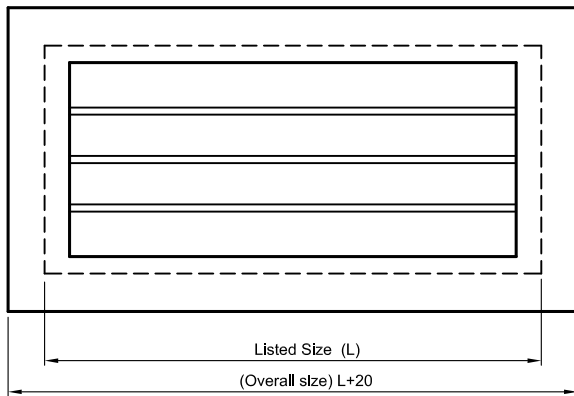



30T 30° Deflection

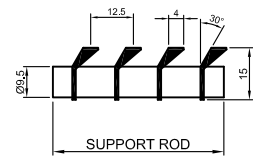

T 30° Two Way Deflection

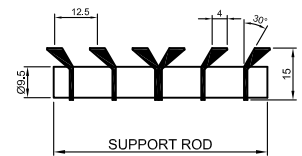


HVA Horizontal front vertical rear adjustable bar

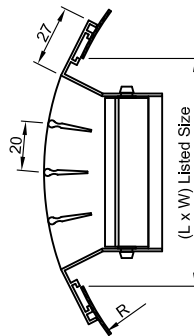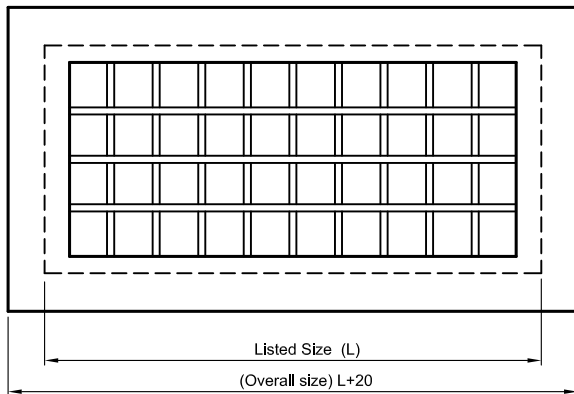

3. Accessory

D With attached damper

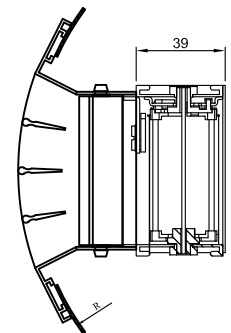

Description.

- Extruded aluminum construction
- Suitable for curved duct (spiral duct).
- Finish: Powder coated finish RAL - 9016
- Standard coating thickness - 55 microns.

Model : CDG- - -

1 2 3

Note:

- This submittal is mean to demonstrate general dimension of the product. The drawing on submittal are not mean to detail every aspect of product with exactness. Drawing are not to scale. COSMOS reserve to the right to make changes without written notice.
- All Dimensions are in mm.
- Dimensions are ± 1.5mm